



Red Hat Enterprise Linux 8

Deduplicating and compressing logical volumes on RHEL

Deploying VDO on LVM to increase the storage capacity

Red Hat Enterprise Linux 8 Deduplicating and compressing logical volumes on RHEL

Deploying VDO on LVM to increase the storage capacity

Legal Notice

Copyright © 2024 Red Hat, Inc.

The text of and illustrations in this document are licensed by Red Hat under a Creative Commons Attribution–Share Alike 3.0 Unported license ("CC-BY-SA"). An explanation of CC-BY-SA is available at

<http://creativecommons.org/licenses/by-sa/3.0/>

. In accordance with CC-BY-SA, if you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, the Red Hat logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux[®] is the registered trademark of Linus Torvalds in the United States and other countries.

Java[®] is a registered trademark of Oracle and/or its affiliates.

XFS[®] is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL[®] is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js[®] is an official trademark of Joyent. Red Hat is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack[®] Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

Abstract

Use the Virtual Data Optimizer (VDO) feature in Logical Volume Manager (LVM) to manage deduplicated and compressed logical volumes. You can manage VDO as a type of LVM's Logical Volume (LV), similar to LVM thin-provisioned volumes. You can deploy VDO on LVM (LVM-VDO) to provide deduplicated storage for block access, file access, local storage, and remote storage. You can also configure a thin-provisioned VDO volume to avoid the physical space of the VDO volume being 100% used. You can manage the VDO volume by using the LVM tools after importing the VDO volume into LVM.

Table of Contents

PROVIDING FEEDBACK ON RED HAT DOCUMENTATION	3
CHAPTER 1. INTRODUCTION TO VDO ON LVM	4
CHAPTER 2. LVM-VDO REQUIREMENTS	5
2.1. VDO MEMORY REQUIREMENTS	5
2.2. VDO STORAGE SPACE REQUIREMENTS	6
2.3. EXAMPLES OF VDO REQUIREMENTS BY PHYSICAL SIZE	6
2.4. PLACEMENT OF LVM-VDO IN THE STORAGE STACK	7
CHAPTER 3. CREATING A DEDUPLICATED AND COMPRESSED LOGICAL VOLUME	9
3.1. LVM-VDO DEPLOYMENT SCENARIOS	9
3.2. THE PHYSICAL AND LOGICAL SIZE OF AN LVM-VDO VOLUME	11
3.3. SLAB SIZE IN VDO	12
3.4. INSTALLING VDO	13
3.5. CREATING AN LVM-VDO VOLUME	13
3.6. CREATING VDO VOLUMES IN THE WEB CONSOLE	14
3.7. FORMATTING VDO VOLUMES IN THE WEB CONSOLE	16
3.8. EXTENDING VDO VOLUMES IN THE WEB CONSOLE	18
3.9. MOUNTING AN LVM-VDO VOLUME	19
3.10. CHANGING THE COMPRESSION SETTINGS ON AN LVM-VDO VOLUME	19
3.11. CHANGING THE DEDUPLICATION SETTINGS ON AN LVM-VDO VOLUME	20
3.12. MANAGING THIN PROVISIONING WITH VIRTUAL DATA OPTIMIZER	21
CHAPTER 4. IMPORTING EXISTING VDO VOLUMES TO LVM	25
CHAPTER 5. TRIM OPTIONS ON AN LVM-VDO VOLUME	27
5.1. ENABLING DISCARD MOUNT OPTION ON VDO	27
5.2. SETTING UP PERIODIC TRIM OPERATION	27
CHAPTER 6. OPTIMIZING VDO PERFORMANCE	29
6.1. VDO THREAD TYPES	29
6.2. IDENTIFYING PERFORMANCE BOTTLENECKS	30
6.2.1. Analyzing VDO performance with top	30
6.2.2. Interpreting top results	30
6.2.3. Analyzing VDO performance with perf	31
6.2.4. Analyzing VDO performance with sar	32
6.3. REDISTRIBUTING VDO THREADS	33
6.3.1. Grouping VDO threads across NUMA nodes	33
6.3.2. Configuring the CPU affinity	34
6.4. INCREASING BLOCK MAP CACHE SIZE TO ENHANCE PERFORMANCE	35
6.5. SPEEDING UP DISCARD OPERATIONS	36
6.6. OPTIMIZING CPU FREQUENCY SCALING	37

PROVIDING FEEDBACK ON RED HAT DOCUMENTATION

We appreciate your feedback on our documentation. Let us know how we can improve it.

Submitting feedback through Jira (account required)

1. Log in to the [Jira](#) website.
2. Click **Create** in the top navigation bar.
3. Enter a descriptive title in the **Summary** field.
4. Enter your suggestion for improvement in the **Description** field. Include links to the relevant parts of the documentation.
5. Click **Create** at the bottom of the dialogue.

CHAPTER 1. INTRODUCTION TO VDO ON LVM

The Virtual Data Optimizer (VDO) feature provides inline block-level deduplication, compression, and thin provisioning for storage. You can manage VDO as a type of Logical Volume Manager (LVM) Logical Volumes (LVs), similar to LVM thin-provisioned volumes.

VDO volumes on LVM (LVM-VDO) contain the following components:

VDO pool LV

- This is the backing physical device that stores, deduplicates, and compresses data for the VDO LV. The VDO pool LV sets the physical size of the VDO volume, which is the amount of data that VDO can store on the disk.
- Currently, each VDO pool LV can hold only one VDO LV. As a result, VDO deduplicates and compresses each VDO LV separately. Duplicate data that is stored on separate LVs do not benefit from data optimization of the same VDO volume.

VDO LV

- This is the virtual, provisioned device on top of the VDO pool LV. The VDO LV sets the provisioned, logical size of the VDO volume, which is the amount of data that applications can write to the volume before deduplication and compression occurs.

If you are already familiar with the structure of an LVM thin-provisioned implementation, you can refer to Table 1.1 to understand how the different aspects of VDO are presented to the system.

Table 1.1. A comparison of components in VDO on LVM and LVM thin provisioning

	Physical device	Provisioned device
VDO on LVM	VDO pool LV	VDO LV
LVM thin provisioning	Thin pool	Thin volume

Since the VDO is thin-provisioned, the file system and applications only see the logical space in use and not the actual available physical space. Use scripting to monitor the available physical space and generate an alert if use exceeds a threshold. For information about monitoring the available VDO space see the [Monitoring VDO](#) section.

Additional resources

- [Deduplicating and compressing storage](#)
- [Creating and managing thin provisioned volumes \(thin volumes\)](#)

CHAPTER 2. LVM-VDO REQUIREMENTS

VDO on LVM has certain requirements on its placement and your system resources.

2.1. VDO MEMORY REQUIREMENTS

Each VDO volume has two distinct memory requirements:

The VDO module

VDO requires a fixed 38 MB of RAM and several variable amounts:


- 1.15 MB of RAM for each 1 MB of configured block map cache size. The block map cache requires a minimum of 150MB RAM.
- 1.6 MB of RAM for each 1 TB of logical space.
- 268 MB of RAM for each 1 TB of physical storage managed by the volume.

The UDS index

The Universal Deduplication Service (UDS) requires a minimum of 250 MB of RAM, which is also the default amount that deduplication uses. You can configure the value when formatting a VDO volume, because the value also affects the amount of storage that the index needs.

The memory required for the UDS index is determined by the index type and the required size of the deduplication window:

Index type	Deduplication window	Note
Dense	1 TB per 1 GB of RAM	A 1 GB dense index is generally sufficient for up to 4 TB of physical storage.
Sparse	10 TB per 1 GB of RAM	A 1 GB sparse index is generally sufficient for up to 40 TB of physical storage.



NOTE

The minimal disk usage for a VDO volume using default settings of 2 GB slab size and 0.25 dense index, requires approx 4.7 GB. This provides slightly less than 2 GB of physical data to write at 0% deduplication or compression.

Here, the minimal disk usage is the sum of the default slab size and dense index.

The UDS Sparse Indexing feature is the recommended mode for VDO. It relies on the temporal locality of data and attempts to retain only the most relevant index entries in memory. With the sparse index, UDS can maintain a deduplication window that is ten times larger than with dense, while using the same amount of memory.

Although the sparse index provides the greatest coverage, the dense index provides more deduplication advice. For most workloads, given the same amount of memory, the difference in deduplication rates between dense and sparse indexes is negligible.

Additional resources

- [Examples of VDO requirements by physical size](#)

2.2. VDO STORAGE SPACE REQUIREMENTS

You can configure a VDO volume to use up to 256 TB of physical storage. Only a certain part of the physical storage is usable to store data. This section provides the calculations to determine the usable size of a VDO-managed volume.

VDO requires storage for two types of VDO metadata and for the UDS index:

- The first type of VDO metadata uses approximately 1 MB for each 4 GB of *physical storage* plus an additional 1 MB per slab.
- The second type of VDO metadata consumes approximately 1.25 MB for each 1 GB of *logical storage*, rounded up to the nearest slab.
- The amount of storage required for the UDS index depends on the type of index and the amount of RAM allocated to the index. For each 1 GB of RAM, a dense UDS index uses 17 GB of storage, and a sparse UDS index will use 170 GB of storage.

Additional resources

- [Examples of VDO requirements by physical size](#)
- [Slab size in VDO](#)

2.3. EXAMPLES OF VDO REQUIREMENTS BY PHYSICAL SIZE

The following tables provide approximate system requirements of VDO based on the physical size of the underlying volume. Each table lists requirements appropriate to the intended deployment, such as primary storage or backup storage.

The exact numbers depend on your configuration of the VDO volume.

Primary storage deployment

In the primary storage case, the UDS index is between 0.01% to 25% the size of the physical size.

Table 2.1. Storage and memory requirements for primary storage

Physical size	RAM usage: UDS	RAM usage: VDO	Disk usage	Index type
10GB-1TB	250MB	472MB	2.5GB	Dense
2-10TB	1GB	3GB	10GB	Dense
	250MB		22GB	Sparse
11-50TB	2GB	14GB	170GB	Sparse
51-100TB	3GB	27GB	255GB	Sparse

Physical size	RAM usage: UDS	RAM usage: VDO	Disk usage	Index type
101-256TB	12GB	69GB	1020GB	Sparse

Backup storage deployment

In the backup storage case, the UDS index covers the size of the backup set but is not bigger than the physical size. If you expect the backup set or the physical size to grow in the future, factor this into the index size.

Table 2.2. Storage and memory requirements for backup storage

Physical size	RAM usage: UDS	RAM usage: VDO	Disk usage	Index type
10GB-1TB	250MB	472MB	2.5 GB	Dense
2-10TB	2GB	3GB	170GB	Sparse
11-50TB	10GB	14GB	850GB	Sparse
51-100TB	20GB	27GB	1700GB	Sparse
101-256TB	26GB	69GB	3400GB	Sparse

2.4. PLACEMENT OF LVM-VDO IN THE STORAGE STACK

You must place certain storage layers under a VDO logical volume and others above it.

You can place thick-provisioned layers on top of VDO, but you cannot rely on the guarantees of thick provisioning in that case. Because the VDO layer is thin-provisioned, the effects of thin provisioning apply to all layers above it. If you do not monitor the VDO volume, you might run out of physical space on thick-provisioned volumes above VDO.

The supported placement of the following layers is under VDO. Do not place them above VDO:

- DM Multipath
- DM Crypt
- Software RAID (LVM or MD RAID)

The following configurations are **not supported**:

- VDO on top of a loopback device
- Encrypted volumes on top of VDO
- Partitions on a VDO volume
- RAID, such as LVM RAID, MD RAID, or any other type, on top of a VDO volume

- [Deploying Ceph Storage on LVM-VDO](#)

Additional resources

- [Stacking LVM volumes knowledgebase article](#)

CHAPTER 3. CREATING A DEDUPLICATED AND COMPRESSED LOGICAL VOLUME

You can create an LVM logical volume that uses the VDO feature to deduplicate and compress data.

3.1. LVM-VDO DEPLOYMENT SCENARIOS

You can deploy VDO on LVM (LVM-VDO) in a variety of ways to provide deduplicated storage for:

- block access
- file access
- local storage
- remote storage

Because LVM-VDO exposes its deduplicated storage as a regular logical volume (LV), you can use it with standard file systems, iSCSI and FC target drivers, or as unified storage.




NOTE

Deploying Ceph Storage on LVM-VDO is currently not supported.

KVM


You can deploy LVM-VDO on a KVM server configured with Direct Attached Storage.

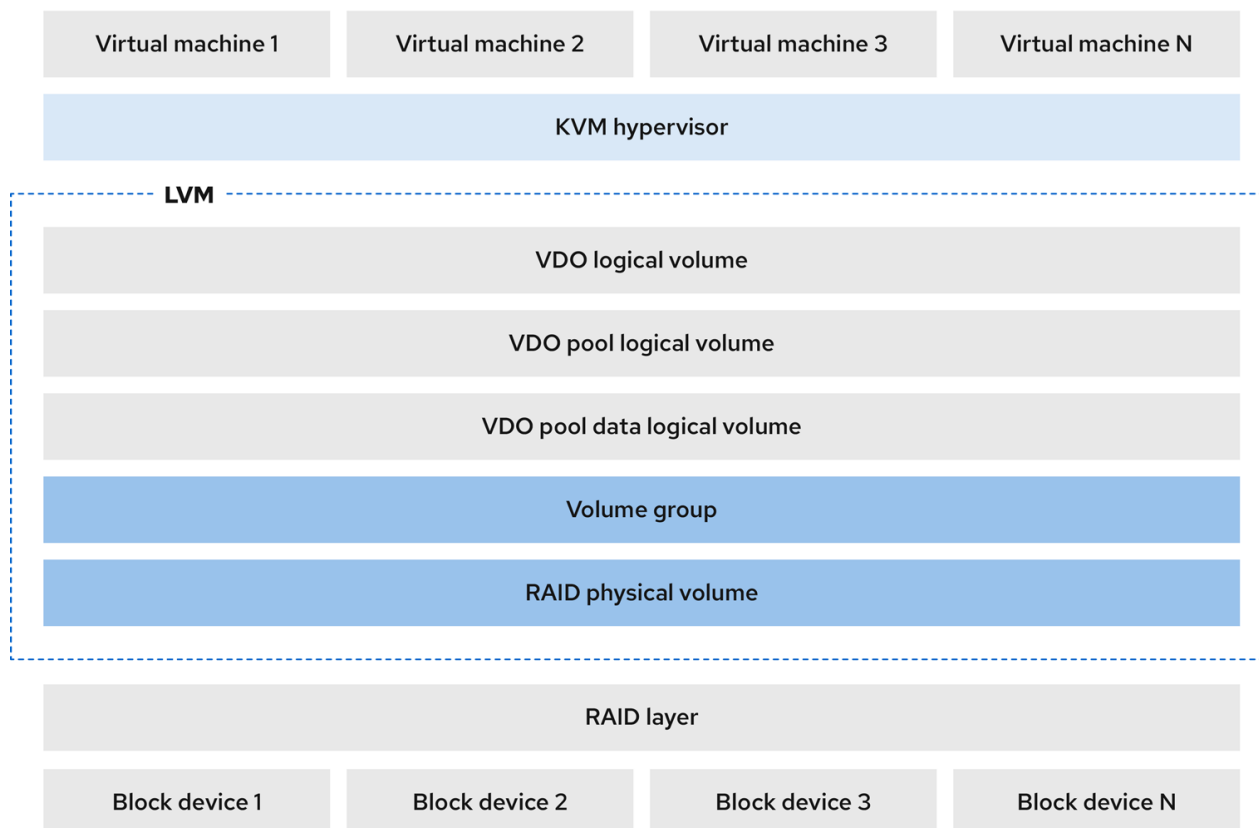

275_RHEL_1022

File systems


You can create file systems on top of a VDO LV and expose them to NFS or CIFS users with the NFS server or Samba.

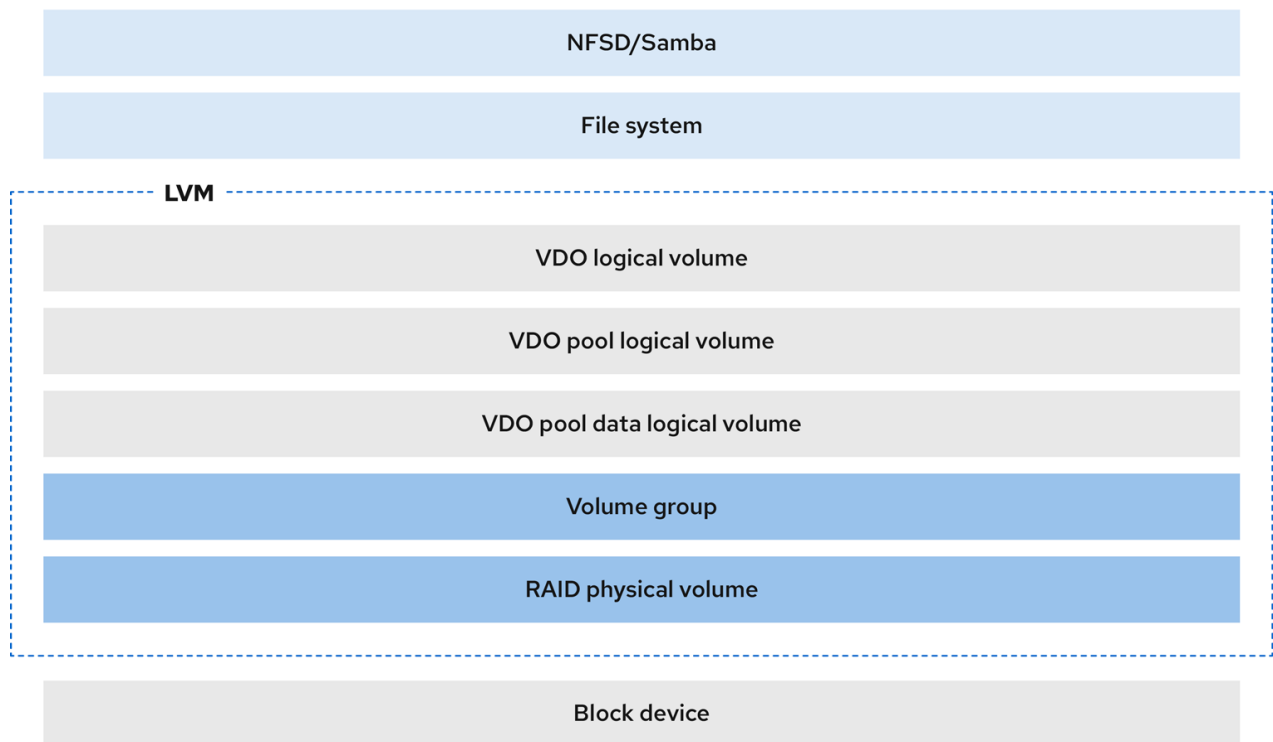

275_RHEL_1022

iSCSI target


You can export the entirety of the VDO LV as an iSCSI target to remote iSCSI initiators.

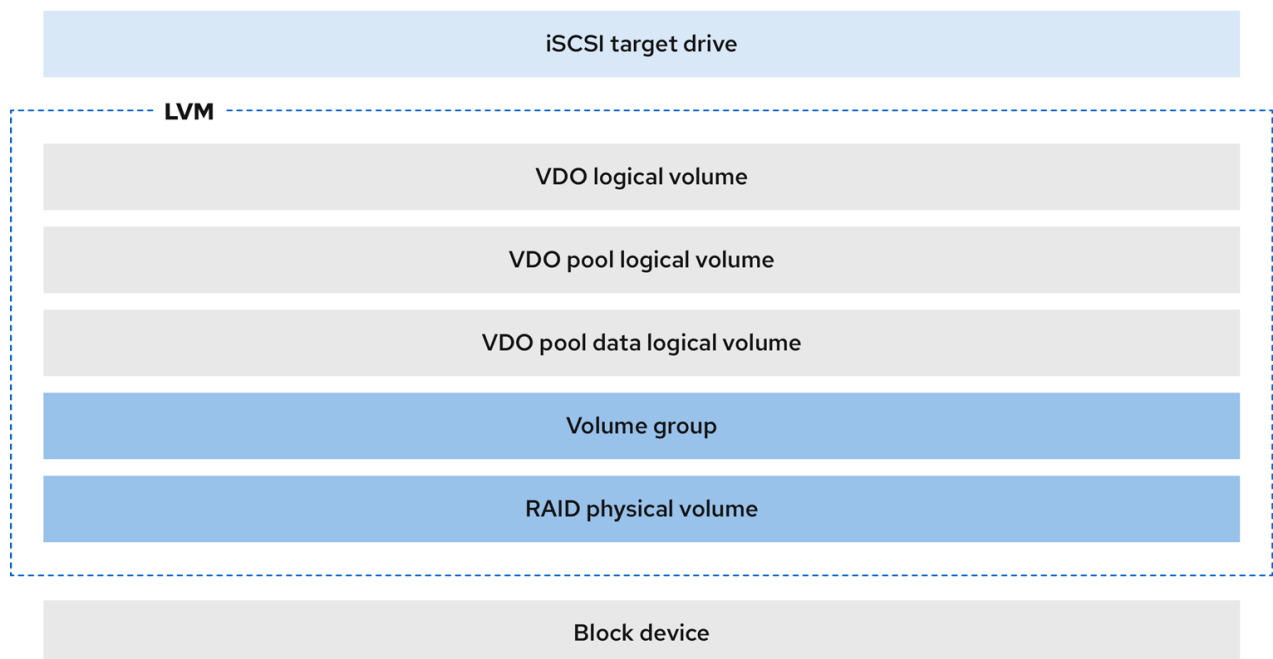

275_RHEL_1022

Encryption

Device Mapper (DM) mechanisms such as DM Crypt are compatible with VDO. Encrypting a VDO LV volumes helps ensure data security, and any file systems above the VDO LV are still deduplicated.

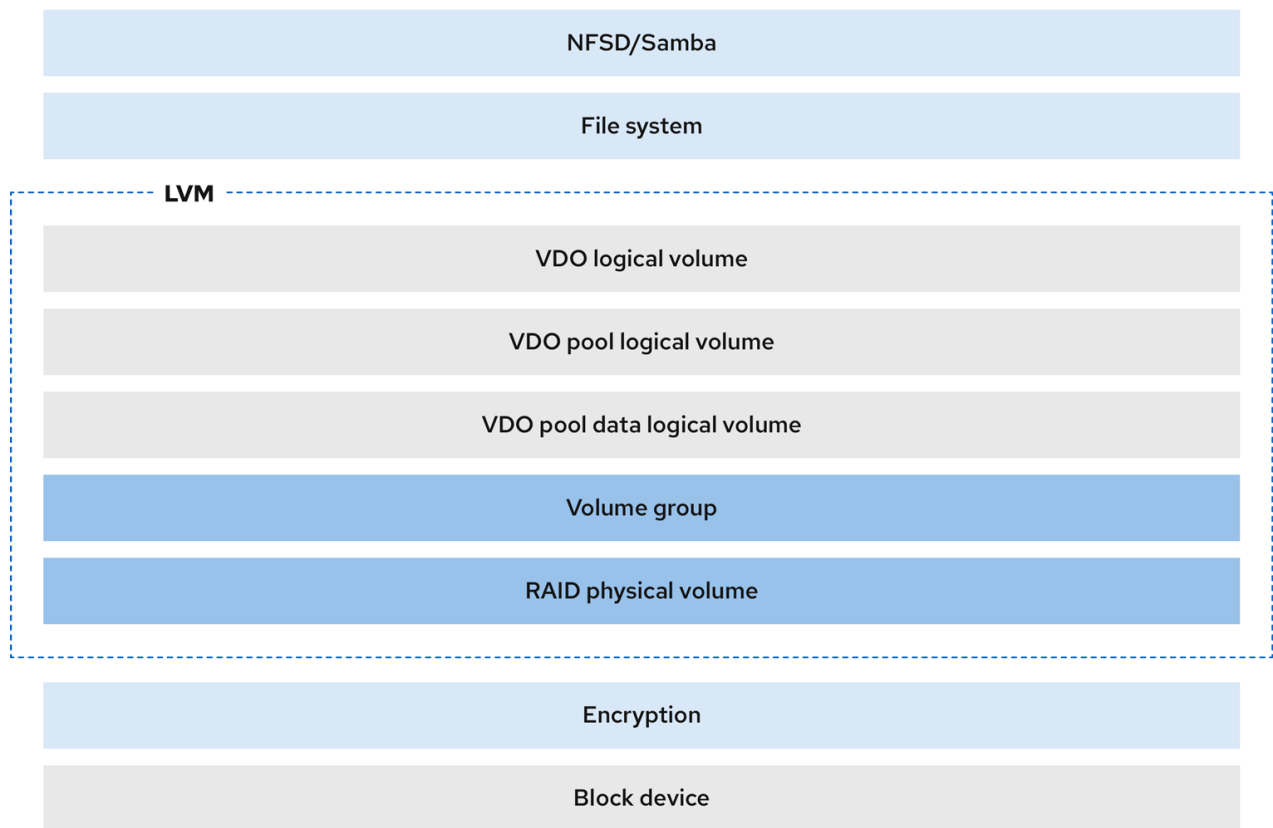

275_RHEL_1022



IMPORTANT

Applying the encryption layer above the VDO LV results in little if any data deduplication. Encryption makes duplicate blocks different before VDO can deduplicate them.

Always place the encryption layer below the VDO LV.

3.2. THE PHYSICAL AND LOGICAL SIZE OF AN LVM-VDO VOLUME

This section describes the physical size, available physical size, and logical size that VDO can utilize.

Physical size

This is the same size as the physical extents allocated to the VDO pool LV. VDO uses this storage for:

- User data, which might be deduplicated and compressed
- VDO metadata, such as the UDS index

Available physical size

This is the portion of the physical size that VDO is able to use for user data.

It is equivalent to the physical size minus the size of the metadata, rounded down to a multiple of the slab size.

Logical Size

This is the provisioned size that the VDO LV presents to applications. It is usually larger than the available physical size. VDO currently supports any logical size up to 254 times the size of the physical volume with an absolute maximum logical size of 4 PB.

When you set up a VDO logical volume (LV), you specify the amount of logical storage that the VDO LV presents. When hosting active VMs or containers, Red Hat recommends provisioning storage at a 10:1 logical to physical ratio, that is, if you are utilizing 1 TB of physical storage, you would present it as 10 TB of logical storage.

If you do not specify the `--virtualsize` option, VDO provisions the volume to a **1:1** ratio. For example, if you put a VDO LV on top of a 20 GB VDO pool LV, VDO reserves 2.5 GB for the UDS index, if the default index size is used. The remaining 17.5 GB is provided for the VDO metadata and user data. As a result, the available storage to consume is not more than 17.5 GB, and can be less due to metadata that makes up the actual VDO volume.

Additional resources

- [Examples of VDO requirements by physical size](#)

3.3. SLAB SIZE IN VDO

The physical storage of the VDO volume is divided into a number of slabs. Each slab is a contiguous region of the physical space. All of the slabs for a given volume have the same size, which can be any power of 2 multiple of 128 MB up to 32 GB.

The default slab size is 2 GB to facilitate evaluating VDO on smaller test systems. A single VDO volume can have up to 8192 slabs. Therefore, in the default configuration with 2 GB slabs, the maximum allowed physical storage is 16 TB. When using 32 GB slabs, the maximum allowed physical storage is 256 TB. VDO always reserves at least one entire slab for metadata, and therefore, the reserved slab cannot be used for storing user data.

Slab size has no effect on the performance of the VDO volume.

Table 3.1. Recommended VDO slab sizes by physical volume size

Physical volume size	Recommended slab size
10-99 GB	1 GB
100 GB - 1 TB	2 GB
2-256 TB	32 GB



NOTE

The minimal disk usage for a VDO volume using default settings of 2 GB slab size and 0.25 dense index, requires approx 4.7 GB. This provides slightly less than 2 GB of physical data to write at 0% deduplication or compression.

Here, the minimal disk usage is the sum of the default slab size and dense index.

You can control the slab size by providing the `--config 'allocation/vdo_slab_size_mb=size-in-megabytes'` option to the `lvcreate` command.

3.4. INSTALLING VDO

This procedure installs software necessary to create, mount, and manage VDO volumes.

Procedure

- Install the VDO software:

```
# yum install lvm2 kmod-kvdo vdo
```

3.5. CREATING AN LVM-VDO VOLUME

This procedure creates an VDO logical volume (LV) on a VDO pool LV.

Prerequisites

- Install the VDO software. For more information, see [Installing VDO](#).
- An LVM volume group with free storage capacity exists on your system.

Procedure

1. Pick a name for your VDO LV, such as **vdo1**. You must use a different name and device for each VDO LV on the system.
In all the following steps, replace *vdo-name* with the name.

2. Create the VDO LV:

```
# lvcreate --type vdo \
  --name vdo-name \
  --size physical-size \
  --virtualsize logical-size \
  vg-name
```

- Replace *vg-name* with the name of an existing LVM volume group where you want to place the VDO LV.
- Replace *logical-size* with the amount of logical storage that the VDO LV will present.
- If the physical size is larger than 16TiB, add the following option to increase the slab size on the volume to 32GiB:

```
--config 'allocation/vdo_slab_size_mb=32768'
```

If you use the default slab size of 2GiB on a physical size larger than 16TiB, the `lvcreate` command fails with the following error:

```
ERROR - vdoformat: formatVDO failed on '/dev/device': VDO Status: Exceeds maximum
number of slabs supported
```

Example 3.1. Creating a VDO LV for container storage

For example, to create a VDO LV for container storage on a 1TB VDO pool LV, you can use:

```
# lvcreate --type vdo \
  --name vdo1 \
  --size 1T \
  --virtualsize 10T \
  vg-name
```



IMPORTANT

If a failure occurs when creating the VDO volume, remove the volume to clean up.

3. Create a file system on the VDO LV:

- For the XFS file system:

```
# mkfs.xfs -K /dev/vg-name/vdo-name
```

- For the ext4 file system:

```
# mkfs.ext4 -E nodiscard /dev/vg-name/vdo-name
```

Additional resources

- [lvmvdo\(7\)](#) man page


3.6. CREATING VDO VOLUMES IN THE WEB CONSOLE


Create a VDO volume in the RHEL web console.

Prerequisites

- You have installed the RHEL 8 web console.
For instructions, see [Installing and enabling the web console](#).
- The **cockpit-storaged** package is installed on your system.
- An LVM2 group from which you want to create VDO.

Procedure

1. Log in to the RHEL 8 web console.
For details, see [Logging in to the web console](#).
2. Click **Storage**.
3. Click the menu button, , next to the LVM2 group in which you want to create a VDO volume.

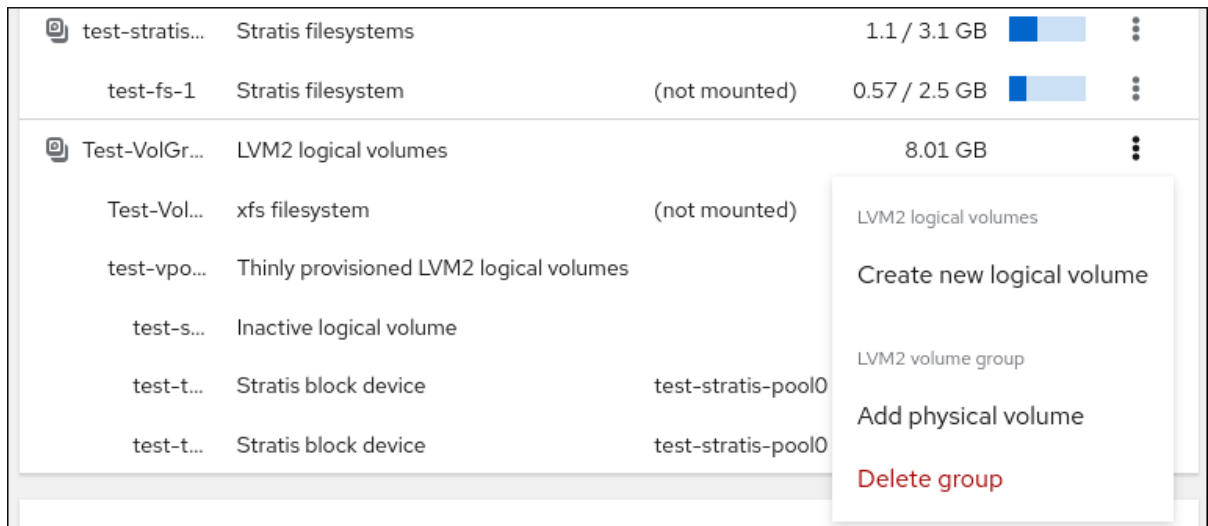

4. Select **VDO filesystem volume** in the drop-down menu next to the **Purpose** field.
5. In the **Name** field, enter a name of the VDO volume without spaces.
6. In the **Logical Size** bar, set up the size of the VDO volume. You can extend it more than ten times, but consider for what purpose you are creating the VDO volume:
 - For active VMs or container storage, use logical size that is ten times the physical size of the volume.
 - For object storage, use logical size that is three times the physical size of the volume.

For details, see [Deploying VDO](#).

7. Select the **Compression** option. This option can efficiently reduce various file formats. For details, see [Changing the compression settings on an LVM-VDO volume](#).
8. Select the **Deduplication** option. This option reduces the consumption of storage resources by eliminating multiple copies of duplicate blocks. For details, see [Changing the deduplication settings on an LVM-VDO volume](#).

Create logical volume

Name

Purpose

Size 8137 MB

Logical size 10.0 GB

Options

Compression ?

Deduplication ?

- Check that you can see the new VDO volume in the **Storage** section. Then, you can format it with a file system.

3.7. FORMATTING VDO VOLUMES IN THE WEB CONSOLE

VDO volumes act as physical drives. To use them, you must format them with a file system.



WARNING

Formatting erases all data on the volume.

Prerequisites

- You have installed the RHEL 8 web console.
For instructions, see [Installing and enabling the web console](#).
- The **cockpit-storaged** package is installed on your system.
- A VDO volume is created.

Procedure

1. Log in to the RHEL 8 web console.
For details, see [Logging in to the web console](#).
2. Click **Storage**.
3. Click the LVM2 volume group containing the VDO volume you want to format.
4. Click the menu button, **⋮**, at the end of the line with the VDO volume you want to format.
5. Click **Format**.

The screenshot shows the Storage web console interface. At the top, it displays 'Storage > vgroup0'. Below this, there are two main sections: 'LVM2 volume group' and 'LVM2 logical volumes'.

LVM2 volume group

- Name:** vgroup0 [edit](#)
- UUID:** Kqo7Ok-26BU-6ThT-bOh5-hq9E-NBq6-xYuEfL
- Capacity:** 8.01 GB, 7.46 GiB, 8011120640 bytes
- Physical volumes:**
 - sdb1 Partition - Kingston DT 101 II (001372997BD5F941C63402DA) 6.0 / 8.0

LVM2 logical volumes

ID	Type	Location	Size	Actions
test-vdo-0	Unformatted data		8.00 GB	⋮

A context menu is open over the 'test-vdo-0' logical volume, showing the following options: 'Unformatted data', 'Format', 'LVM2 logical volume', 'Shrink', 'Grow', 'Deactivate', 'Delete', 'LVM2 VDO pool', and 'Grow'.

6. In the **Name** field, enter the logical volume name.
7. In the **Mount Point** field, add the mount path.
8. By default, the web console rewrites only the disk header after you finish this dialog. The advantage of this option is the speed of formatting. If you check the **Overwrite existing data with zeros** option, the web console rewrites the whole disk with zeros. This option is slower because the program has to go through the whole disk. Use this option if the disk includes any sensitive data and you want to rewrite them.
9. In the **Type** drop-down menu, select a file system:
 - The default option, the **XFS** file system, supports large logical volumes, switching physical drives online without outage, and growing. XFS does not support shrinking volumes. Therefore, you cannot reduce the size of a volume formatted with XFS.
 - The **ext4** file system supports logical volumes, switching physical drives online without outage, growing, and shrinking.

You can also select a version with the LUKS (Linux Unified Key Setup) encryption, which allows you to encrypt the volume with a passphrase.

10. In the **At boot** drop-down menu, select when you want to mount the volume.
11. Click **Format and mount** or **Format only**.
Formatting can take several minutes depending on the used formatting options and the volume size.

⚠ Format /dev/vgroup0/test-vdo-0

Name

Mount point

Type

Overwrite Overwrite existing data with zeros (slower)

Encryption

At boot

- Mounts before services start
- Appropriate for critical mounts, such as /var
- ⚠ Boot fails if filesystem does not mount, preventing remote access

Mount options Mount read only
 Custom mount options

Formatting erases all data on a storage device.

Verification

- After a successful finish, you can see the details of the formatted VDO volume on the **Storage** tab and in the LVM2 volume group tab.

3.8. EXTENDING VDO VOLUMES IN THE WEB CONSOLE

Extend VDO volumes in the RHEL 8 web console.

Prerequisites

- You have installed the RHEL 8 web console.
For instructions, see [Installing and enabling the web console](#).
- The **cockpit-storaged** package is installed on your system.
- The VDO volume is created.

Procedure

1. Log in to the RHEL 8 web console.
For details, see [Logging in to the web console](#).
2. Click **Storage**.
3. Click your VDO volume in the **VDO Devices** box.
4. In the VDO volume details, click the **Grow** button.

5. In the **Grow logical size of VDO** dialog box, extend the logical size of the VDO volume.
6. Click **Grow**.

Verification

- Check the VDO volume details for the new size to verify that your changes have been successful.

3.9. MOUNTING AN LVM-VDO VOLUME

This procedure mounts a file system on an LVM-VDO volume, either manually or persistently.

Prerequisites

- An LVM-VDO volume exists on your system. For more information, see [Creating an LVM-VDO volume](#).

Procedure

- To mount the file system on the LVM-VDO volume manually, use:

```
# mount /dev/vg-name/vdo-name mount-point
```

- To configure the file system to mount automatically at boot, add a line to the **/etc/fstab** file:
 - For the XFS file system:

```
/dev/vg-name/vdo-name mount-point xfs defaults 0 0
```

- For the ext4 file system:

```
/dev/vg-name/vdo-name mount-point ext4 defaults 0 0
```

If the LVM-VDO volume is located on a block device that requires network, such as iSCSI, add the **_netdev** mount option. For iSCSI and other block devices requiring network, see the **systemd.mount(5)** man page for information about the **_netdev** mount option.

Additional resources

- **systemd.mount(5)** man page

3.10. CHANGING THE COMPRESSION SETTINGS ON AN LVM-VDO VOLUME

By default, the compression of a VDO pool logical volume (LV) is enabled. To save CPU usage, you can disable it. Enable or disable compression by using the **lvchange** command.

Prerequisites

- An LVM-VDO volume exists on your system.

Procedure

Procedure

1. Check the compression status for your logical volumes:

```
# lvs -o+vdo_compression,vdo_compression_state
LV      VG      Attr      LSize  Pool  Origin Data%  Meta%  Move Log Cpy%Sync
Convert VDOCompression VDOCompressionState
vdo_name vg_name vwi-a-v--- 1.00t vpool0 0.00                enabled
online
vpool0  vg_name dwi----- <15.00g          20.03                enabled
online
```

2. Disable the compression for VDOPoolLV:

```
# lvchange --compression n vg-name/vdopoolname
```

If you want to enable the compression, use the **y** option instead of **n**.

Verification

- View the current status of compression:

```
# lvs -o+vdo_compression,vdo_compression_state
LV      VG      Attr      LSize  Pool  Origin Data%  Meta%  Move Log Cpy%Sync
Convert VDOCompression VDOCompressionState
vdo_name vg_name vwi-a-v--- 1.00t vpool0 0.00                offline
vpool0  vg_name dwi----- <15.00g          20.03                offline
```

Additional resources

- [lvmvdo\(7\)](#) man page
- [lvcreate\(8\)](#) man page

3.11. CHANGING THE DEDUPLICATION SETTINGS ON AN LVM-VDO VOLUME

By default, the deduplication of a VDO pool logical volume (LV) is enabled. To save memory, you can disable deduplication. Enable or disable deduplication by using the **lvchange** command.



NOTE

Because of the way that VDO handles ongoing parallel I/O operations, a VDO volume continues to identify duplicate data within those operations. For example, if a VM clone operation is in progress and a VDO volume has many duplicate blocks in close proximity, then the volume can still achieve some amount of space savings by using deduplication. The index state of the volume does not affect the process.

Prerequisites

- An LVM-VDO volume exists on your system.

Procedure

1. Check the deduplication status for your logical volumes:

```
# lvs -o+vdo_deduplication,vdo_index_state
LV      VG      Attr      LSize  Pool  Origin Data%  Meta%  Move Log Cpy%Sync
Convert VDO  Deduplication  VDO  IndexState
  vdo_name  vg_name  vwi-a-v---  1.00t  vpool0  0.00                                enabled
online
  vpool0    vg_name  dwi----- <15.00g          20.03                                enabled
online
```

2. Disable the deduplication for VDOPoolLV:

```
# lvchange --deduplication n vg-name/vdopoolname
```

If you want to enable the deduplication, use the **y** option instead of **n**.

Verification

- View the current status of deduplication:

```
# lvs -o+vdo_deduplication,vdo_index_state
LV      VG      Attr      LSize  Pool  Origin Data%  Meta%  Move Log Cpy%Sync
Convert VDO  Deduplication  VDO  IndexState
  vdo_name  vg_name  vwi-a-v---  1.00t  vpool0  0.00                                closed
  vpool0    vg_name  dwi----- <15.00g          20.03                                closed
```

Additional resources

- **lvmvdo(7)** man page
- **lvcreate(8)** man page

3.12. MANAGING THIN PROVISIONING WITH VIRTUAL DATA OPTIMIZER

It is possible to configure a thin-provisioned VDO volume to prepare for future expansion of the physical space, in order to address a condition where the physical space usage of the VDO volume is approaching 100%. Instead of using **-I 100%FREE** in the **lvcreate** operation, for example, use '95%FREE' to ensure that there is some reserved space for recovery later on if needed. This procedure describes how to resolve the following issues:

- The volume runs out of space
- The file system enters read-only mode
- ENOSPC reported by the volume



NOTE

The best way to address high physical space usage on a VDO volume is to delete unused files, and discard the blocks used by these unused files either by using online discard or the **fstrim** program. The physical space of a VDO volume can only be grown to 8192 slabs that is 16 TB for a VDO volume with the default slab size of 2 GB, or 256 TB for a VDO volume with the maximal slab size of 32 GB.

In all of the following steps, replace *myvg* and *myvdo* with the volume group and VDO name respectively.

Prerequisites

1. Install the VDO software. For more information, see [Installing VDO](#).
2. An LVM volume group with free storage capacity exists on your system.
3. A thin-provisioned VDO volume using the **lvcreate --type vdo --name myvdo myvg -L logical-size-of-pool --virtualsize virtual-size-of-vdo** command. For more information, see [Creating an LVM-VDO volume](#).

Procedure

1. Determine the optimal logical size for a thin-provisioned VDO volume

```
# vdostats myvg-vpool0-vpool
```

Device	1K-blocks Used	Available	Use%	Space saving%
<i>myvg-vpool0-vpool</i>	104856576	29664088	75192488	28% 69%

To calculate the space savings ratio, use the following formula:

```
Savings ratio = 1 / (1 - Space saving%)
```

In this example,

- there is approximately a **3.22:1** space savings ratio on a data set of about 80 GB.
 - Multiplying the data set size by the ratio would yield a potential logical size of 256 GB if more data with the same space savings were written to the VDO volume.
 - Adjusting this number downward to 200 GB yields a logical size with a safe margin of free physical space, given the same space savings ratio.
2. Monitor the free physical space in a VDO volume:

```
# vdostats myvg-vpool0-vpool
```

This command can be executed periodically to provide monitoring of the used and free physical space of the VDO volume.

3. Optional: View the warnings on physical space usage on a VDO volume by using the available **/usr/share/doc/vdo/examples/monitor/monitor_check_vdostats_physicalSpace.pl** script:

```
# /usr/share/doc/vdo/examples/monitor/monitor_check_vdostats_physicalSpace.pl myvg-
vpool0-vpool
```

4. When creating a VDO volume, the **dmeventd** monitoring service monitors the usage of physical space in a VDO volume. This is enabled by default when a VDO volume is created or started. Use the **journalctl** command to view the output of **dmeventd** in the logs while monitoring a VDO volume:

```
lvm[8331]: Monitoring VDO pool myvg-vpool0-vpool.
...
lvm[8331]: WARNING: VDO pool myvg-vpool0-vpool is now 84.63% full.
lvm[8331]: WARNING: VDO pool myvg-vpool0-vpool is now 91.01% full.
lvm[8331]: WARNING: VDO pool myvg-vpool0-vpool is now 97.34% full.
```

5. Remediate VDO volumes that are almost out of available physical space. When it is possible to add a physical space to a VDO volume, but the volume space is full before it can be grown, it may be necessary to temporarily stop I/O to the volume. To temporarily stop I/O to the volume, execute the following steps, where VDO volume *myvdo* contains a file system mounted on the */users/homeDir* path:

- a. Freeze the filesystem:

```
# xfs_freeze -f /users/homeDir
# vgextend myvg /dev/vdc2
# lvextend -l new_size myvg/vpool0-name
# xfs_freeze -u /users/homeDir
```

- b. Unmount the filesystem:

```
# umount /users/homeDir
# vgextend myvg /dev/vdc2
# lvextend -l new_size myvg/vpool0-name
# mount -o discard /dev/myvg/myvdo /users/homeDir
```



NOTE

Unmounting or freezing a filesystem with cached data will incur a write of the cached data, which may fill the physical space of the VDO volume. Consider the maximum amount of cached filesystem data when setting a monitoring threshold for free physical space on a VDO volume.

6. Blocks that are no longer used by a file system can be cleaned up by using the **fstrim** utility. Executing **fstrim** against a mounted file system on top of a VDO volume may result in increased free physical space for that volume. The **fstrim** utility will send discards to the VDO volume, which are then used to remove references to the previously used blocks. If any of those blocks are single-referenced, the physical space will be available to use.

- a. Check VDO stats to see what the current amount of free space is:

```
# vdostats --human-readable myvg-vpool0-vpool
```

Device	Size	Used	Available	Use%	Space saving%
<i>myvg-vpool0-vpool</i>	100.0G	95.0G	5.0G	95%	73%

- b. Discard unused blocks:

```
# fstrim /users/homeDir
```

- c. View the free physical space of the VDO volume:

```
# vdostats --human-readable myvg-vpool0-vpool
```

Device	Size	Used	Available	Use%	Space saving%
<i>myvg-vpool0-vpool</i>	100.0G	30.0G	70.0G	30%	43%

In this example, after executing **fstrim** on the file system, the discards were able to return 65G of physical space to use in the VDO volume.



NOTE

Discarding volumes with lower levels of deduplication and compression will have a possibility of reclaiming physical space than discarding volumes with higher levels of deduplication and compression. A volume that has high levels of deduplication and compression may potentially require a more extensive cleanup to reclaim physical space than just simply discarding already unused blocks.

CHAPTER 4. IMPORTING EXISTING VDO VOLUMES TO LVM

You can import a VDO volume that was created by the VDO manager into LVM. As a result, you can manage the volume as a logical volume using the LVM tools.



NOTE

The import operation is not reversible. After converting an existing VDO volume to LVM, accessing the VDO data is only possible using the LVM commands and the **VDO** manager no longer controls the volume.

Prerequisites

- Install the VDO software. For more information, see [Installing VDO](#).

Procedure

1. Convert an existing VDO volume created by the **VDO** manager into a logical volume. In the following command, replace *vg-name* with the volume group name, *lv-name* with the logical volume name, and */dev/sdg1* with the VDO device:

```
# lvm_import_vdo --name vg-name/lv-name /dev/sdg1
```

```
Convert VDO device "/dev/sdg1" to VDO LV "vg-name/lv-name"? [y|N]: Yes
```

```
Stopping VDO vdo-name
```

```
Converting VDO vdo-name
```

```
Opening /dev/disk/by-id/scsi-36d094660575ece002291bd67517f677a-part1 exclusively
```

```
Loading the VDO superblock and volume geometry
```

```
Checking the VDO state
```

```
Converting the UDS index
```

```
Converting the VDO
```

```
Conversion completed for '/dev/disk/by-id/scsi-36d094660575ece002291bd67517f677a-part1': VDO is now offset by 2097152 bytes
```

```
Physical volume "/dev/sdg1" successfully created.
```

```
Volume group "vg-name" successfully created
```

```
WARNING: Logical volume vg-name/lv-name_vpool not zeroed.
```

```
Logical volume "lv-name_vpool" created.
```

```
WARNING: Converting logical volume vg-name/lv-name_vpool to VDO pool volume WITHOUT formatting.
```

```
WARNING: Using invalid VDO pool data MAY DESTROY YOUR DATA!
```

```
Logical volume "lv-name" created.
```

```
Converted vg-name/lv-name_vpool to VDO pool volume and created virtual vg-name/lv-name VDO volume.
```

2. Optional: Create a file system on the VDO LV.
3. Optional: Mount the LVM-VDO volume. For more information, see [Mounting an LVM-VDO volume](#).

Verification

- List your LVM devices to verify that importing the VDO volumes to LVM succeeded:

```
# lvs -a -o +devices
LV          VG      Attr      LSize  Pool           Origin Data%  Meta%  Move Log Cpy%Sync
Convert Devices
lv-name          vg-name vwi-a-v--- 25.00g lv-name_vpool    0.00
lv-name_vpool(0)
lv-name_vpool    vg-name dwi----- <1.82t           0.31                lv-
name_vpool_vdata(0)
[lv-name_vpool_vdata] vg-name Dwi-ao---- <1.82t
/dev/sdg1(0)
```

Additional resources

- **lvm_import_vdo(8)**, **lvmvdo(7)**, and **systemd.mount(5)** man pages

CHAPTER 5. TRIM OPTIONS ON AN LVM-VDO VOLUME

You can mount your file system with the **discard** option, which informs the VDO volume of the unused space. Another option is to use the **fstrim** application, which is an on-demand discarding, or **mount -o discard** command for immediate discarding.

When using the **fstrim** application, the admin needs to schedule and monitor an additional process, while using **mount -o discard** command allows for immediate recovery of space when possible.

Note that it is currently recommended to use **fstrim** application to discard unused blocks rather than the **discard** mount option because the performance impact of this option can be quite severe. For this reason, **nodiscard** is the default.

5.1. ENABLING DISCARD MOUNT OPTION ON VDO

This procedure enables the **discard** option on your VDO volume.

Prerequisites

- An LVM-VDO volume exists on your system.

Procedure

- Enable the **discard** on your volume:

```
# mount -o discard /dev/vg-name/vdo-name mount-point
```

Additional resources

- **xfs(5)**, **mount(8)**, and **lvmvdo(7)** man pages

5.2. SETTING UP PERIODIC TRIM OPERATION

This procedure enables a scheduled TRIM operation on your system.

Prerequisites

- An LVM-VDO volume exists on your system.

Procedure

- Enable and start the timer:

```
# systemctl enable --now fstrim.timer
```

Verification

- Verify that the timer is enabled:

```
# systemctl list-timers fstrim.timer
```

Example 5.1. Possible output of the verification procedure

```
# systemctl list-timers fstrim.timer
NEXT          LEFT    LAST PASSED UNIT    ACTIVATES
Mon 2021-05-10 00:00:00 EDT 5 days left n/a  n/a    fstrim.timer fstrim.service
```



NOTE

You will not see any reference to a VDO volume, because the **fstrim.timer** runs across all mounted filesystems.

Additional resources

- **fstrim(8)** man page

CHAPTER 6. OPTIMIZING VDO PERFORMANCE

The VDO kernel driver speeds up tasks by using multiple threads. Instead of one thread doing everything for an I/O request, it splits the work into smaller parts assigned to different threads. These threads talk to each other as they handle the request. This way, one thread can handle shared data without constant locking and unlocking.

When one thread finishes a task, VDO already has another task ready for it. This keeps the threads busy and reduces the time spent switching tasks. VDO also uses separate threads for slower tasks, such as adding I/O operations to the queue or handling messages to the deduplication index.

6.1. VDO THREAD TYPES

VDO uses various thread types to handle specific operations:

Logical zone threads (**kvdo:logQ**)

Maintain the mapping between the logical block numbers (LBNs) presented to the user of the VDO device and the physical block numbers (PBNs) in the underlying storage system. They also prevent concurrent writes to the same block. Logical threads are active during both read and write operations. Processing is generally evenly distributed, however, specific access patterns may occasionally concentrate work in one thread. For example, frequent access to LBNs in a specific block map page might make one logical thread handle all those operations.

Physical zone threads (**kvdo:physQ**)

Handle data block allocation and reference counts during write operations.

I/O submission threads (**kvdo:bioQ**)

Handle the transfer of block I/O (**bio**) operations from VDO to the storage system. They handle I/O requests from other VDO threads and pass them to the underlying device driver. These threads interact with device-related data structures, create requests for device driver kernel threads, and prevent delays when I/O requests get blocked due to a full device request queue.

CPU-processing threads (**kvdo:cpuQ**)

Handle CPU-intensive tasks that do not block or need exclusive access to data structures for to other thread types. These tasks include calculating hash values and compressing data blocks.

I/O acknowledgement threads (**kvdo:ackQ**)

Signal the completion of I/O requests to higher-level components, such as the kernel page cache or application threads performing direct I/O. Their CPU usage and impact on memory contention are influenced by kernel-level code.

Hash zone threads (**kvdo:hashQ**)

Coordinate I/O requests with matching hashes to handle potential deduplication tasks. Although they create and manage deduplication requests, they do not perform significant computations. A single hash zone thread is usually sufficient.

Deduplication thread (**kvdo:dedupeQ**)

Handles I/O requests and communicates with the deduplication index. This work is performed on a separate thread to prevent blocking. It also has a timeout mechanism to skip deduplication if the index does not respond quickly. There is only one deduplication thread per VDO device.

Journal thread (**kvdo:journalQ**)

Updates the recovery journal and schedules journal blocks for writing. This task cannot be divided among multiple threads. There is only one journal thread per VDO device.

Packer thread (**kvdo:packerQ**)

Works during write operations when the compression is enabled. It collects compressed data blocks from the CPU threads to reduce wasted space. There is only one packer thread per VDO device.

6.2. IDENTIFYING PERFORMANCE BOTTLENECKS

Identifying bottlenecks in VDO performance is crucial for optimizing system efficiency. One of the primary steps you can take is to determine whether the bottleneck lies in the CPU, memory, or the speed of the backing storage. After pinpointing the slowest component, you can develop strategies for enhancing performance.

To ensure that the root cause of the low performance is not a hardware issue, run tests with and without VDO in the storage stack.

The **journalQ** thread in VDO is a natural bottleneck, especially when the VDO volume is handling write operations. If you notice that another thread type has higher utilization than the **journalQ** thread, you can remediate this by adding more threads of that type.


6.2.1. Analyzing VDO performance with top

You can examine the performance of VDO threads by using the **top** utility.

Procedure

1. Display the individual threads:

```
$ top -H
```



NOTE

Tools such as **top** cannot differentiate between productive CPU cycles and cycles stalled due to cache or memory delays. These tools interpret cache contention and slow memory access as actual work. Moving threads between nodes can appear like reduced CPU utilization while increasing operations per second.

2. Press the **f** key to display the fields manager.
3. Use the (**↓**) key to navigate to the **P = Last Used Cpu (SMP)** field.
4. Press the spacebar to select the **P = Last Used Cpu (SMP)** field.
5. Press the **q** key to close the fields manager. The **top** utility now displays the CPU load for individual cores and indicates which CPU each process or thread recently used. You can switch to per-CPU statistics by pressing **1**.

Additional resources

- [top\(1\) man page](#)
- [Interpreting top results](#)

6.2.2. Interpreting top results

While analyzing the performance of VDO threads, use the following table to interpret results of the **top** utility.

Table 6.1. Interpreting top results

Values	Description	Suggestions
Thread or CPU usage surpasses 70%.	The thread or CPU is overloaded. High usage can result from a VDO thread scheduled on a CPU with no actual work. This may happen due to excessive hardware interrupts, memory conflicts, or resource competition.	Increase the number of threads of the type running this core.
Low %id and %wa values	The core is actively handling tasks.	No action required.
Low %hi value	The core is performing standard processing work.	Add more cores to improve the performance. Avoid NUMA conflicts.
<ul style="list-style-type: none"> • High %hi value [a] • Only one thread is assigned to the core • %id is zero • %wa values is zero 	The core is over-committed.	Reassign kernel threads and device interrupt handling to different cores.
<ul style="list-style-type: none"> • kvdo:bioQ threads frequently in D state. 	VDO is consistently keeping the storage system busy with I/O requests. [b]	Reduce the number of I/O submission threads if the CPU utilization is very low.
kvdo:bioQ threads frequently in S state.	VDO has more kvdo:bioQ threads than it needs.	Reduce the number of kvdo:bioQ threads.
High CPU utilization per I/O request.	CPU utilization per I/O request increases with more threads.	Check for CPU, memory, or lock contention.
[a] More than a few percent		
[b] This is good if the storage system can handle multiple requests or if request processing is efficient.		

6.2.3. Analyzing VDO performance with perf

You can check the CPU performance of VDO by using the **perf** utility.

Prerequisites

- The **perf** package is installed.

Procedure

1. Display the performance profile:

```
# perf top
```

2. Analyze the CPU performance by interpreting **perf** results:

Table 6.2. Interpreting perf results


Values	Description	Suggestions
kvdo:bioQ threads spend excessive cycles acquiring spin locks	Too much contention might be occurring in the device driver below VDO	Reduce the number of kvdo:bioQ threads
High CPU usage	Contention between NUMA nodes. Check counters such as stalled-cycles-backend , cache-misses , and node-load-misses if they are supported by your processor. High miss rates might cause stalls, resembling high CPU usage in other tools, indicating possible contention.	Implement CPU affinity for the VDO kernel threads or IRQ affinity for interrupt handlers to restrict processing work to a single node.

Additional resources

- **perf-top(1)** man page

6.2.4. Analyzing VDO performance with sar

You can create periodic reports on VDO performance by using the **sar** utility.



NOTE

Not all block device drivers can provide the data needed by the **sar** utility. For example, devices such as MD RAID do not report the **%util** value.

Prerequisites

- Install the **sysstat** utility:

```
# yum install sysstat
```

Procedure

1. Displays the disk I/O statistics at 1-second intervals:

```
$ sar -d 1
```

- 2. Analyze the VDO performance by interpreting **sar** results:

Table 6.3. Interpreting sar results

Values	Description	Suggestions
<ul style="list-style-type: none"> ● The %util value for the underlying storage device is well under 100%. ● VDO is busy at 100%. ● bioQ threads are using a lot of CPU time. 	VDO has too few bioQ threads for a fast device.	<p>Add more bioQ threads.</p> <p>Note that certain storage drivers might slow down when you add bioQ threads due to spin lock contention.</p>

Additional resources

- **sar(1)** man page

6.3. REDISTRIBUTING VDO THREADS

VDO uses various thread pools for different tasks when handling requests. Optimal performance depends on setting the right number of threads in each pool, which varies based on available storage, CPU resources, and the type of workload. You can spread out VDO work across multiple threads to improve VDO performance.

VDO aims to maximize performance through parallelism. You can improve it by allocating more threads to a bottlenecked task, depending on factors such as available CPU resources and the root cause of the bottleneck. High thread utilization (above 70–80%) can lead to delays. Therefore, increasing thread count can help in such cases. However, excessive threads might hinder performance and incur extra costs.

For optimal performance, carry out these actions:

- Test VDO with various expected workloads to evaluate and optimize its performance.
- Increase thread count for pools with more than 50% utilization.
- Increase the number of cores available to VDO if the overall utilization is greater than 50%, even if the individual thread utilization is lower.

6.3.1. Grouping VDO threads across NUMA nodes

Accessing memory across NUMA nodes is slower than local memory access. On Intel processors where cores share the last-level cache within a node, cache problems are more significant when data is shared between nodes than when it is shared within a single node. While many VDO kernel threads manage exclusive data structures, they often exchange messages about I/O requests. VDO threads being spread across multiple nodes or the scheduler reassigning threads between nodes might cause contention, that is multiple nodes competing for the same resources.

You can enhance VDO performance by grouping certain threads on the same NUMA nodes.

Group related threads together on one NUMA node

- I/O acknowledgment (**ackQ**) threads
- Higher-level I/O submission threads:
 - User-mode threads handling direct I/O
 - Kernel page cache flush thread

Optimize device access

- If device access timing varies across NUMA nodes, run **bioQ** threads on the node closest to the storage device controllers

Minimize contention

- Run I/O submissions and storage device interrupt processing on the same node as **logQ** or **physQ** threads.
- Run other VDO-related work on the same node.
- If one node cannot handle all VDO work, consider memory contention when moving threads to other nodes. For example, move the device that interrupts handling and **bioQ** threads to another node.

6.3.2. Configuring the CPU affinity

You can improve VDO performance on certain storage device drivers if you adjust the CPU affinity of VDO threads.

When the interrupt (IRQ) handler of the storage device driver does substantial work and the driver does not use a threaded IRQ handler, it could limit the ability of the system scheduler to optimize VDO performance.

For optimal performance, carry out these actions:

- Dedicate specific cores to IRQ handling and adjust VDO thread affinity if the core is overloaded. The core is overloaded if the **%hi** value is more than a few percent higher than on other cores.
- Avoid running singleton VDO threads, like the **kvdo:journalQ** thread, on busy IRQ cores.
- Keep other thread types off cores busy with IRQs only if the individual CPU use is high .



NOTE

The configuration does not persist across system reboots.

Procedure

- Set the CPU affinity:

```
# taskset -c <cpu-numbers> -p <process-id>
```

Replace **<cpu-numbers>** with a comma-separated list of CPU numbers to which you want to assign the process. Replace **<process-id>** with the ID of the running process to which you want to set CPU affinity.

Example 6.1. Setting CPU Affinity for kvdo processes on CPU cores 1 and 2

```
# for pid in `ps -eo pid,comm | grep kvdo | awk '{ print $1 }'`
do
    taskset -c "1,2" -p $pid
done
```

Verification

- Display the affinity set:

```
# taskset -p <cpu-numbers> -p <process-id>
```

Replace **<cpu-numbers>** with a comma-separated list of CPU numbers to which you want to assign the process. Replace **<process-id>** with the ID of the running process to which you want to set CPU affinity.

Additional resources

- **taskset(1)** man page

6.4. INCREASING BLOCK MAP CACHE SIZE TO ENHANCE PERFORMANCE

You can enhance read and write performance by increasing the cache size for your VDO volume.

If you have extended read and write latencies or a significant volume of data read from storage that does not align with application requirements, you might need to adjust the cache size.

**WARNING**

When you increase a block map cache, the cache uses the amount of memory that you specified, plus an additional 15% of memory. Larger cache sizes use more RAM and affect overall system stability.

The following example shows how to change the cache size from 128Mb to 640Mb in your system.

Procedure

1. Check the current cache size of your VDO volume:

```
# lvs -o vdo_block_map_cache_size
VDOBlockMapCacheSize
    128.00m
    128.00m
```

2. Deactivate the VDO volume:

```
# lvchange -an vg_name/vdo_volume
```

3. Change the VDO setting:

```
# lvchange --vdosettings "block_map_cache_size_mb=640" vg_name/vdo_volume
```

Replace **640** with your new cache size in megabytes.



NOTE

The cache size must be a multiple of 4096, within the range of 128MB to 16TB, and at least 16MB per logical thread. Changes take effect the next time the VDO device is started. Already running devices are not affected.

4. Activate the VDO volume:

```
# lvchange -ay vg_name/vdo_volume
```

Verification

- Check the current VDO volume configuration:

```
# lvs -o vdo_block_map_cache_size vg_name/vdo_volume
VDOBlockMapCacheSize
640.00m
```

Additional resources

- [lvchange\(8\)](#) man page

6.5. SPEEDING UP DISCARD OPERATIONS

VDO sets a maximum allowed size of DISCARD (TRIM) sectors for all VDO devices on the system. The default size is 8 sectors, which corresponds to one 4-KiB block. Increasing the DISCARD size can significantly improve the speed of the discard operations. However, there is a tradeoff between improving discard performance and maintaining the speed of other write operations.

The optimal DISCARD size varies depending on the storage stack. Both very large and very small DISCARD sectors can potentially degrade the performance. Conduct experiments with different values to discover one that delivers satisfactory results.

For a VDO volume that stores a local file system, it is optimal to use a DISCARD size of 8 sectors, which is the default setting. For a VDO volume that serves as a SCSI target, a moderately large DISCARD size, such as 2048 sectors (corresponds to a 1MB discard), works best. It is recommended that the maximum DISCARD size does not exceed 10240 sectors, which translates to 5MB discard. When choosing the size, make sure it is a multiple of 8, because VDO may not handle discards effectively if they are smaller than 8 sectors.

Procedure

1. Set the new maximum size for the DISCARD sector:


```
# echo <number-of-sectors> > /sys/kvdo/max_discard_sectors
```

Replace **<number-of-sectors>** with the number of sectors. This setting persists until reboot.

2. Optional: To make the persistent change to the DISCARD sector across reboot, create a custom **systemd** service:

- a. Create a new **/etc/systemd/system/max_discard_sectors.service** file with the following content:

```
[Unit]
Description=Set maximum DISCARD sector
[Service]
ExecStart=/usr/bin/echo <number-of-sectors> > /sys/kvdo/max_discard_sectors

[Install]
WantedBy=multi-user.target
```

Replace **<number-of-sectors>** with the number of sectors.

- b. Save the file and exit.
- c. Reload the service file:

```
# systemctl daemon-reload
```

- d. Enable the new service:

```
# systemctl enable max_discard_sectors.service
```

Verification

- Optional: If you made the scaling governor change persistent, check if the **max_discard_sectors.service** is enabled:

```
# systemctl is-enabled max_discard_sectors.service
```

6.6. OPTIMIZING CPU FREQUENCY SCALING

By default, RHEL uses CPU frequency scaling to save power and reduce heat when the CPU is not under heavy load. To prioritize performance over power savings, you can configure the CPU to operate at its maximum clock speed. This ensures that the CPU can handle data deduplication and compression processes with maximum efficiency. By running the CPU at its highest frequency, resource-intensive operations can be executed more quickly, potentially improving the overall performance of VDO in terms of data reduction and storage optimization.

**WARNING**

Tuning CPU frequency scaling for higher performance can increase power consumption and heat generation. In inadequately cooled systems, this can cause overheating and might result in thermal throttling, which limits the performance gains.

Procedure

1. Display available CPU governors:

```
$ cpupower frequency-info -g
```

2. Change the scaling governor to prioritize performance:

```
# cpupower frequency-set -g performance
```

This setting persists until reboot.

3. Optional: To make the persistent change in scaling governor across reboot, create a custom **systemd** service:

- a. Create a new **/etc/systemd/system/cpufreq.service** file with the following content:

```
[Unit]
Description=Set CPU scaling governor to performance

[Service]
ExecStart=/usr/bin/cpupower frequency-set -g performance

[Install]
WantedBy=multi-user.target
```

- b. Save the file and exit.

- c. Reload the service file:

```
# systemctl daemon-reload
```

- d. Enable the new service:

```
# systemctl enable cpufreq.service
```

Verification

- Display the currently used CPU frequency policy:

```
$ cpupower frequency-info -p
```

- Optional: If you made the scaling governor change persistent, check if the **cpufreq.service** is enabled:

```
█ # systemctl is-enabled cpufreq.service
```